


Remote Control Schematics for V1 and V2 controllers

Heliotrack Dual Axis Remote Control
*Without Dark Return Disable

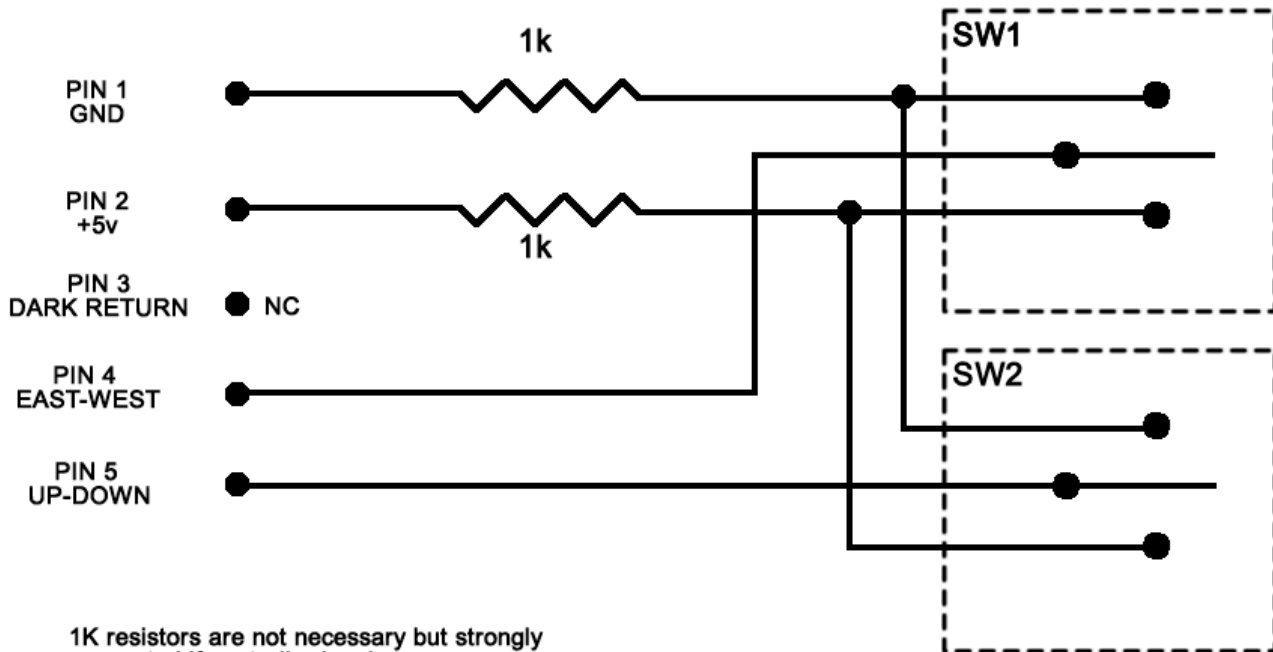


1K resistors are not necessary but strongly suggested if controller has been adjusted at all from factory calibration
They are included for current limiting protection

* NOTE: A tracker trying to dark return will interfere with remote control operation.
Remove the dark return jumpers or unplug the sun sensor while using the remote in dark environments.

Both switches are both toggle SPDT center off.

Heliotrack Dual Axis Remote Control
with Dark Return Disable

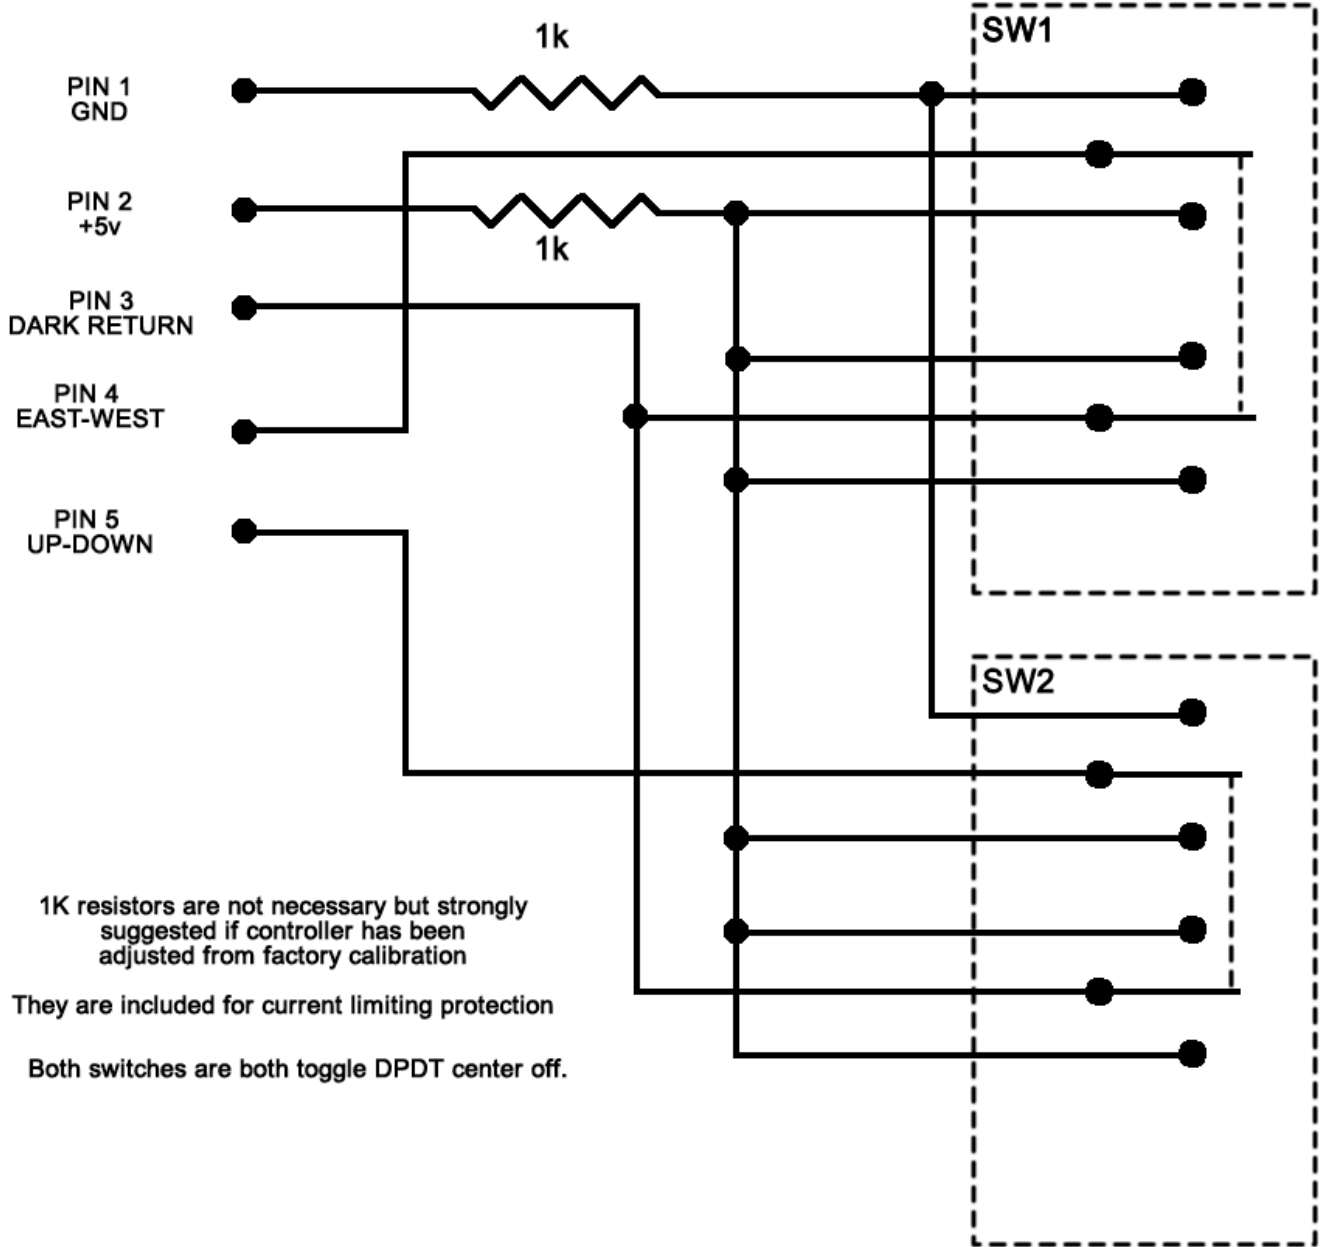

1K resistors are not necessary but strongly suggested if controller has been adjusted from factory calibration

They are included for current limiting protection

Both switches are both toggle DPDT center off.